

GLT-18A

LED TUBE LIGHT

- To draw the contour of large-scale architecture like building, elevated freeway, bridge, curtain wall etc.
- Narrow section, covered by UV-resistant acrylic, Extremely uniform light effect, soft and uniform, consistent light
- Fully sealed and waterproof design with Germany adhesive.

Weight:	700g
Material:	Aluminum+ PMMA cover
Dimension:	1000 x 18 x 26 (mm)
Working Environment:	-40°C ~ +55°C
Service environment:	Outdoor
Average life:	35,000 hours



IP66 Protect Grade	V-0 Fireproof Grade	IK10 Impact Test	Anti-UV	Salt Spray	III
-----------------------	------------------------	---------------------	---------	------------	-----

Product Specifications and Parameters


24V

12W


RGB

S/N	Voltage	Led Chip	Light Control	CCT	Power	Pixel Quantity	Beam Angel	CRI
01	24 VDC	OSRAM/CREE	ON/OFF	2700K - 6500K	15W	-	100°	80
02	24 VDC	OSRAM/CREE	SPI	2700K - 6500K	15W	10 px/m	100°	80
03	24 VDC	OSRAM/CREE	SPI	RGB	12W	8 px/m	100°	-
04	24 VDC	OSRAM/CREE	DMX512	RGB	12W	8 px/m	100°	-
05	24 VDC	OSRAM/CREE	DMX512	RGB+W	15W	8 px/m	100°	-
06	24 VDC	OSRAM/EPISTAR	SPI	RGB	12W	10 px/m	100°	-
07	24 VDC	OSRAM/EPISTAR	SPI	RGB+W	15W	10 px/m	100°	-
08	12 VDC	OSRAM/EPISTAR	SPI	RGB	12W	16 px/m	100°	-

*The data is for reference only,
the actual product size may vary.

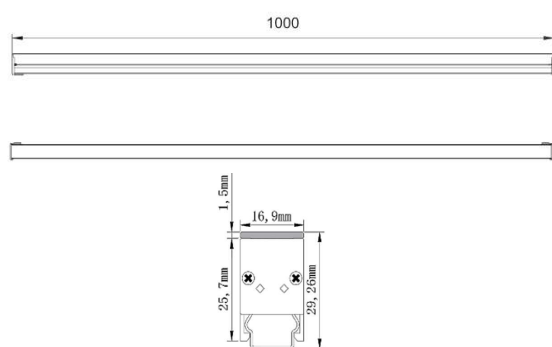

Product Size

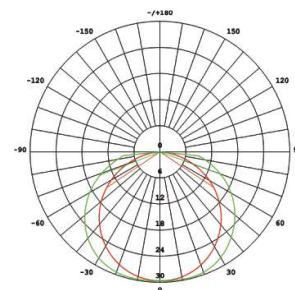

Spatial distribution curves