

GLT30

LED TUBE LIGHT

- To draw the contour of large-scale architecture like building,elevated freeway,bridge,curtain wall etc.
- The products can be lighting areas such as park, scenic,river way,river embankment and others area.
- Building facade,curtain wall large-scale screen.

Weight:	480g
Materia:	Aluminum
Dimension:	1000 x 30 x 42 (mm)
Working Environment:	-40°C ~ +55°C
Service environment:	Outdoor
Averagr life:	50000 hours



IP67 Protect Grade	V-O Fireproof Grade	IK10 Impact Test	Anti-UV	Salt Spray	III
-----------------------	------------------------	---------------------	---------	------------	-----

Product Specifications and Parameters


24V

12W


RGB

S/N	Voltage	Led Chip	Light Control	CCT	Power	Pixel Quantity	Beam Angel	CRI
01	24 VDC	EPISTAR/CREE	ON/OFF	2700K - 6500K	12W	-	130°	80
02	24 VDC	EPISTAR/CREE	SPI	2700K - 6500K	12W	10 px/m	130°	80
03	24 VDC	EPISTAR/CREE	SPI	RGB	12W	8 px/m	130°	-
04	24 VDC	EPISTAR/CREE	DMX512	RGB	12W	8 px/m	130°	-
05	24 VDC	EPISTAR/CREE	DMX512	RGB+W	15W	8 px/m	130°	-
06	12 VDC	EPISTAR/CREE	SPI	RGB	12W	16 px/m	130°	-
07	12 VDC	EPISTAR/CREE	DMX512	RGB	12W	16 px/m	130°	-

*The data is for reference only,
the actual product size may vary.

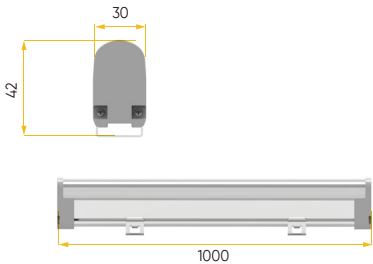

Product Size



Spatial distribution curves