

WINDOW SILL LIGHT

- Highlights window frames, curtains, or decorative objects placed on the sill. Enhances safety and visibility if the sill protrudes.
- Creates an ambient glow around the window, provide accent lighting, or highlight architectural details
- Fully sealed and waterproof design.

Basic Specification

Product name	Window Sill Light
Type	Facade Illumination
Model No.	HWF5542C
Body Material	Die-Cast Auminum
Cover	Toughened glass
Mounting:	Surface mount
IP Protection	IP66
Dimensions	W 42 x H54.5 x L 500 MM
Net Weight (1 pcs)	1.55 kg

Electrical Specification

Power Consumption	20W
Input Voltage	DC24V/DC48V
Power Factor	≥0.95
Control Method	On-Off/DMX512/RDM


Lighting Specification

Color Temperature	2200-6500K/RGB/RGBW
CRI	80 @4000K
LED Chip	OSRAM
LED Qty	8 pcs
Luminous Flux	1000 Lm @4000K
Beam Angle	8 x 120°
LED Lifespan	≥50000 hr @Ta 40 °C
Working Temperature	-25 °C ~ 58 °C




IP66 Protect Grade	V-0 Fireproof Grade	IK10 Impact Test	Anti-UV	Salt Spray	III
-----------------------	------------------------	---------------------	---------	------------	-----

Product Drwaing

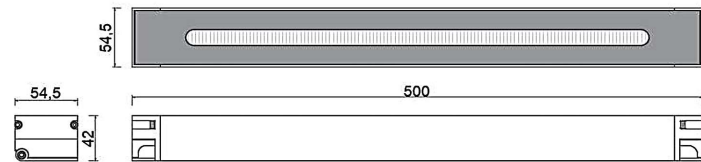

Spatial Distribution Curves

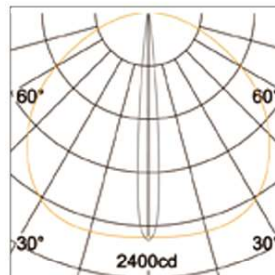

H (m)	E (bc)	D (m)
	C ₀	C ₉₀
	120°	10°
1	2052	3.46
2	513	6.93
3	228	10.39
4	128	13.86
5	82	17.32



The appearance and color of all products listed in this data sheet are for reference only.
Glow reserves the right to modify specifica on and/or discon nue any product at any me without prior notice